



INSTALLATION, OPERATION AND MAINTENANCE PROCEDURES

- Open the cabinet, pressing the clip on the short end of the cabinet, and lift the cabinet from the mounting plate.
- Lead cable through the cable gland and connect to terminal 70V (white - green) or 100V (white - red).
- Choose required power on the transformer.
- Fasten the mounting plate to wall or ceiling by 4 screws.
- Close the cabinet by clipping on the front cover.
- For optimum performance always use the correct voltage/power and operate within the frequency limits as stated.
- Do not open the loudspeaker when energized.
- This loudspeaker is supplied with a 2 years warranty against defective workmanship.

### SAFE 10PT


### DNH SURFACE MOUNTING SELF-EXTINGUISHING POLICARBONATE WALL SPEAKER



SPECIFICATIONS


Material / Color	ABS / RAL 9010
Mounting	4 screws
Termination	Inside screw terminal
Weight w/transformer	0,8kg
IP-rating	44
Max. / min. amb. temp.	90C / -40C
Rated / Max. power	10W / 15W
SPL 1W,1m	85dB
SPL rated power	95dB
Effective freq. range	160 - 20.000Hz
Dispersion (-6dB) 1kHz / 4kHz	140 / 100
Directivity factor, Q	NA

CIRCUIT DIAGRAM

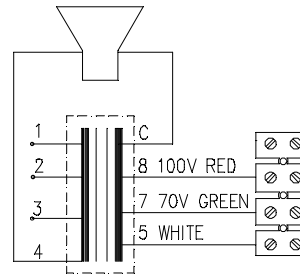

Primary connection	
White:Green	70V
White:Red	100V
Secondary nominal tapings	
C : 1	10,0 W
C : 2	5,0 W
C : 3	2,5 W
C : 4	1,0 W

DIMENSIONS

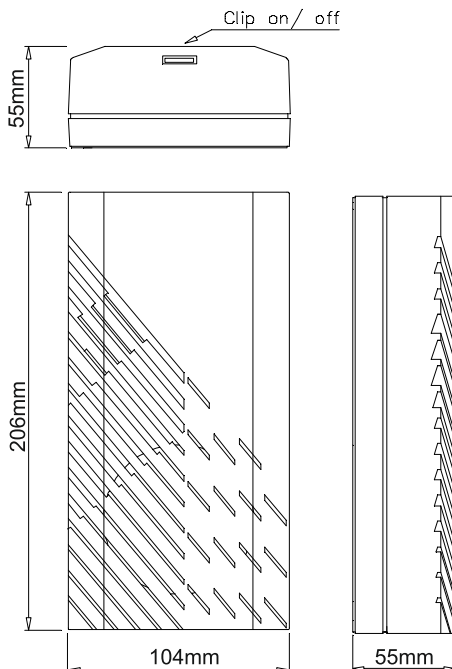

SOUND PRESSURE LEVELS AT 1W,1m

