

MD-S1100 / MD-S1300


HAND-HELD MICROPHONES

Description

A series of professional handheld dynamic microphone design for a wide variety of vocal and sound reinforcement applications. Hypercardioid polar pattern provides better performer sound isolation and effective feedback rejection. A durable Zinc die -cast construction built to endure the rigors of tours and live performances. It all comes in a suedex gray non-slip finished. An efficient internal shockmount system eliminates virtually all handling and cable noise, while multistage integral breath shield effectively reduces wind and noise and speech produced "popping sounds" when performers works extremely close. It also incorporates a built-in ON/OFF switch for convenient control of the microphone.



Dimensions

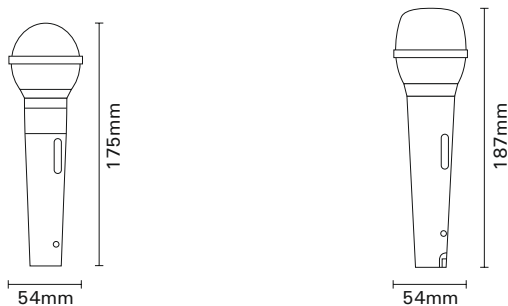

Technical data

MODEL	MD-S1100	MD-S1300
Characteristics	Dynamic	Dynamic
Directivity	Cardioid	Hiper Cardioid
Microphone cables (optional)	XMF-6	XMF-6
	XMF-10	XMF-10
	XMF-15	XMF-15
	XMF-20	XMF-20
	XMF-30	XMF-30
Frequency response	80 ÷ 13kHz	50 ÷ 18kHz
Sensitivity (0dB-1V/micro bar, 1000Hz)	-75 ±3dB	-72 ±3dB
Output impedance	500 ohm	250 ohm
Power supply	----	----
Material	Zamak	Zamak
Accessories included	Stand SU30	Stand SU30
Weight	207gr	362gr

SU 30

Universal clamp-on



Code 11586
Universal hand-help microphone clamp-on

