


CP 3072PRO



Key Features

- Integrated Vision Mixer & Scaler
- 5 mega pixel capacity
- Three output option modes – Dual 2K, 4Kx1K & 4K
- Select or set output resolutions to any requirement
- Dedicated source Preview output with Multiview
- Wide range of transition effects built in
- Up to 3 video layers including background for presentation Program to Preview applications
- Position, Scale, Crop video layers freely
- DSK/Key on foreground video layers
- Wide range of Masks can be applied to any foreground video layer
- Variable edge blending on foreground layers
- Additional three independent layers for OSD, LOGO and STILL
- Connect up to 9 video inputs
- Tally support built-in
- Genlock support built-in
- Modular construction – wide range of input options to choose from
- Flexible control and configuration

Dimensions

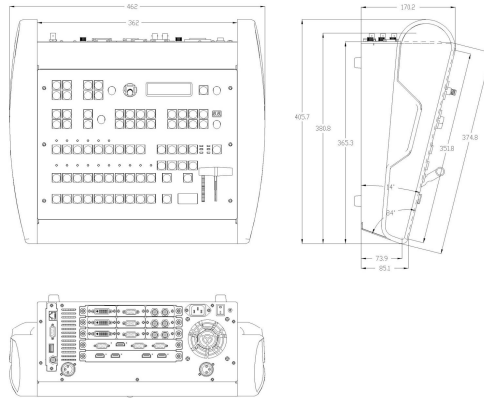


Specification

Connectors	Inputs	Input Video:	Up to 9 inputs - select from Input Module Options
	Outputs	PGM Output:	2 × HDMI
		PST Output:	2 × HDMI
PVW Output:		1 × HDMI 1 × VGA	
Communication Ports	Tally	2 × DSUB-15	
	Integration	DSUB-15	
	Settings	USB-A	
	LAN	TCP/IP	
Performance	Input Resolution	DVI:	VESA: 800x600 1024x768 1280x1024 1600x1200 1920x1080 1920x1200 2048x1152 SMPT: 480i 576i 720p 1080i 1080p
		HDMI:	VESA: 800x600 1024x768 1280x800 1280x960 1280x1024 1400x1050 1600x1200 1920x1080 1920x1200 2048x1152
		SDI:	480i 576i 720p 1080i 1080p
		VGA:	800x600 1024x768 1280x1024 1600x1200 1920x1080 1920x1200
	Refresh Rates:	23.98/24/25/29.97/30/50/59.94/60Hz	
	Output Resolution	Select from standard set or select user configurable	
		SMPT:	1080p 720p 1280x720 1920x1080
VESA:		800x600~2560x816	
Refresh Rates:	23.98 24 25 29.97 30 50 59.94 60		
*Not all resolutions supported on VGA			
Genlock	480i 576i 720p@50/59.94 1080i@50/59.94 1080p@50/59.94/60		
Support Standard	SDI:	SMPT 425M (Level A) SMPT 424M SMPT 292M SMPT 259M-C DVB-ASI	
	VGA:	VGA-UXGA	
	DisplayPort	1.0	
	DVI:	1.0	
	HDMI:	1.3	
Power	Input Voltage	AC 85~264V 50/60Hz	
	Max Power	120W	
Environment	Temperature	-25°C~55°C	
	Humidity	10%~90%	
Physical	Weight	14.6kg (Net Weight) 28.0kg (Package Weight)	
	Dimensions	462mm x 405.7mm x 170.2mm (Device Dimension)	
		605mm x 575mm x 390mm (Package Dimension)	

Order Codes

Product Code	Item
210-3072-01-0	CP 3072PRO Standard support for 6 inputs (2 EXT fitted), add EXT when using more inputs Input & Output modules sold separately Includes Flightcase Wings/Rack Ears sold separately
190-0001-02-1	VGA Input
190-0001-03-1	Display Port
190-0001-04-1	DVI Input
190-0001-06-1	HDMI Input/Loop Out
190-0001-07-1	SDI In/Loop Out
190-0001-09-1	CVBS In/Backup
190-0001-10-1	USB In/Backup
190-0001-15-1	4K Input Module (3 slot)
980-0001-01-1	EXT Module (Support for 3 Input modules)
290-3072-02-1	Wings/Sides for CP 3072PRO
290-3072-01-0	Rack Ears for CP 3072PRO
980-0006-01-0	LED Gooseneck Lamp (Single)

Application

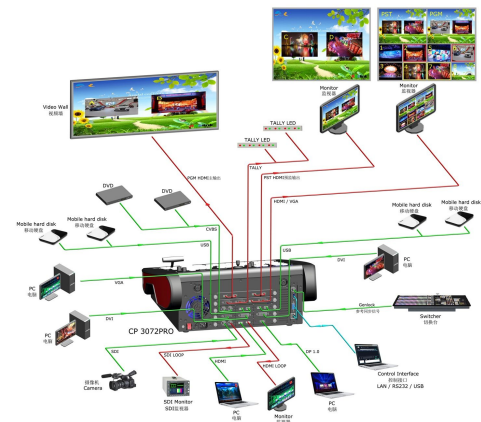

Rhox Áudio e Vídeo Profissional - SIBS Quadra 2 conjunto C Lote 12
Brasília - DF - 71736.203 - Tel (61) 3051-5800
<https://loja.rhox.com.br>



Tel: +86-592-5771197 Fax: +86-592-5788216
E-mail: sales@rgblink.com <http://www.rgblink.com>
Headquarter: S601~604, 606, 607, 504 Weiye Building Torch Hi-Tech Industrial
Development Zone, Xiamen, Fujian Province, P.R.C



Specifications are correct at time of printing and subject to change or alteration without notice.