

Overview:

The 12G-SDI 1x4 Splitter, 4K/60 (500727) allows one (1) 12G/6G/3G/HD/SD-SDI source to be distributed and amplified to up to four (4) 12G/6G/3G/HD/SD-SDI displays. The splitter supports up to 4K (3840 X 2160) video and HD audio, including 480i (SD-SDI), 720p/1080i (HD-SDI), 1080p (3G-SDI), 4K/30 (6G-SDI) and 4K/60 (12G-SDI). The device automatically detects the 12G/6G/3G/HD/SD-SDI signal and re-clocks and regenerates the signal at the output for extending distances between source and displays. Additionally, all connectors are on the rear panel for neater cabling.



Applications:

- Video production
- Post production
- Broadcasting
- Studio to Studio
- Live event
- Mobile video
- Medical imaging display

Key Features:


- Distribute one 12G-SDI source to four displays
- Supports up to 4K @ 60Hz, including 12G/6G/3G/HD/SD-SDI
- Automatically detects re-clocks and regenerates the 12G/6G/3G/HD/SD-SDI signal
- LED diagnostic
- Connectors on rear for neater cabling



Environment	12G-SDI, 6G-SDI, 3G-SDI, HD-SDI & SD-SDI.
Devices	Camera, projectors, monitors, TV.
Transmission	Transparent to the user.
Detection	Auto Detection of the 12G/6G/3G/HD/SD-SDI Signal.
Bandwidth	11.88bps & 11.88/1.001Gbps
Data Rates	1.485, 2.97, 5.96 & 11.88 Gbps
Output Impedance	75Ω
Signals	SDI protocol.
Supported Resolution	12G-SDI: 2160p50/59.94/60Hz (4:2:2) 6G-SDI: 2160p23.98/24/25/29.97/30Hz (4:2:2) 3G-SDI: 1080p50/59.94/60Hz (4:2:2) HD-SDI: 1080p/23.98/24/25/29.97/30Hz 720p/50/59.94/60Hz 1080i/50/59.94/60Hz SD-SDI: NTSC (59.94Hz), PAL (50Hz)
Audio	Up to 8 Audio Channels.
Ancillary Data	Supported
Input Signal	12G-SDI : SMPTE ST2082 6G-SDI : SMPTE ST2081 3G-SDI: SMPTE 424M, 425M HD-SDI: SMPTE 292M, 296M SD-SDI : SMPTE 259M, 344M
Connectors	One (1) BNC Female 75 Ohms, Gold Plated for input. Four (4) BNC Female 75 Ohms, Gold Plated for outputs. One (1) Locking Barrel Jack 2.1mm Power Connector. <i>Note: RG59 coaxial cables not included.</i>
Cable Equalization	12G-SDI up to 230ft (70m) 6G-SDI up to 330ft (100m) 3G-SDI up to 594ft (180m)
Cable	RG-59 or better cable required.
Power Supply	One (1) 110-240V/5VDC power supply with interchangeable blades.
Power Consumption	3.0 Watt (Max)
Temperature	Operating: 0° to 40°C Storage: -20° to 60°C Humidity: Up to 90% non-condensing
Enclosure	Metal
Dimensions	3.19" x 1.61" x 0.95" (81mm x 41mm x 24mm)
Weight	0.37lbs (0.17kg)
Compliance	Regulatory: FCC, CE, RoHS Flammability: 94V0
Warranty	2 years
Order Information	500727 12G-SDI 1x4 Splitter, 4K/60 (UPC: 627699007273)

12G-SDI 1x4 Splitter, 4K60 500727

Typical Application

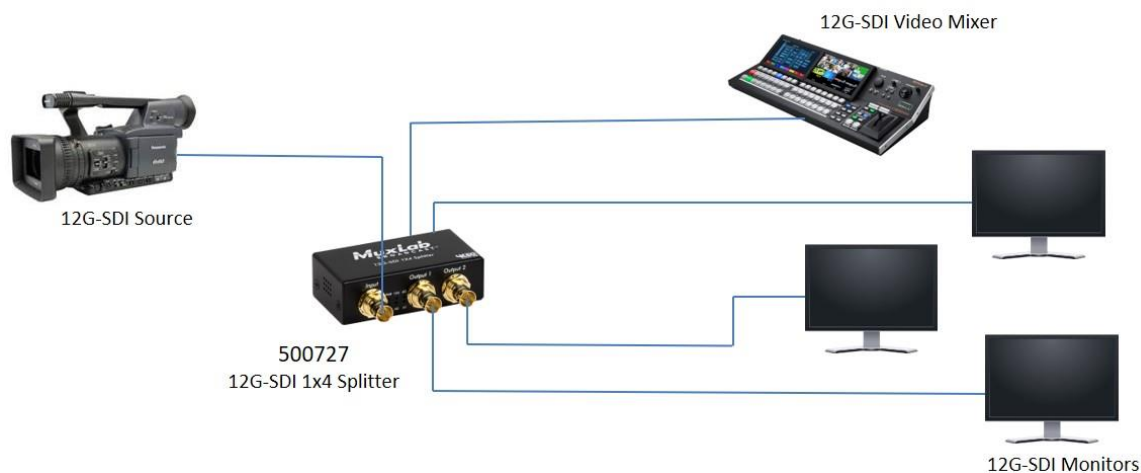

One 12G-SDI source may be connected to up to Four (4) 12G-SDI destination devices



© MuxLab Inc. 2020

12G-SDI 1x4 Splitter, 4K60

MuxLab Inc.
2321 Rue Cohen, Montreal, Quebec, Canada, H4R 2N7
Tel: (514) 905 0588 Fax: (514) 905 0589
Toll Free: 1 877 689-5228
E-mail: Info@muxlab.com
www.muxlab.com



RhoX Áudio e Vídeo Profissional - SIBS Quadra 2 conjunto C Lote 12
Brasília - DF - 71736.203 - Tel (61) 3051-5800
<https://loja.rhox.com.br>

