


**General RAD Description**

The entire family of RAD models interface with HAL or Mongoose, for digital conversion at the wall. Each converts analog audio to and/or from 24-bit, 48 kHz digital audio. Shielded CAT 5e (or better) cable and termination transport four digital audio channels – two channels each direction – as well as power, ground and a communications channel, with status indicators at each RAD, HAL, EXP or Mongoose unit, and in Halogen or Tracker software. The host HAL or Mongoose auto-checks the CAT 5 crimp and verifies audio. All RADs are both “location-aware” and hot-swappable with 500-foot homerun connections (66% farther than Ethernet). Light sensors dim the RAD indicators in dark rooms. Labels can be made and printed from Halogen or Tracker software.


**RAD15**

A RAD15 provides two balanced line inputs on an XLR connectors, and two balanced line outputs on XLR connectors.

The RAD15 mounts in a standard 4-gang US electrical box. It is available in white, ivory, or black, with a matched Decora™ plate cover included. Order model RAD15W for white, RAD15I for ivory, and RAD15B for black.

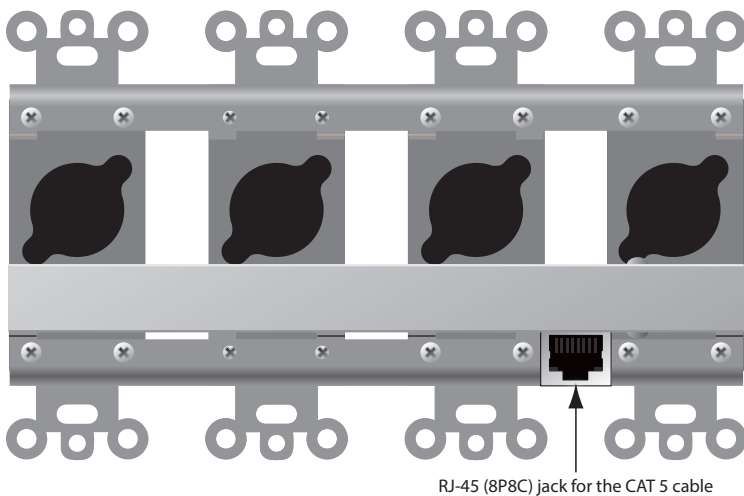

RJ-45 (8P8C) jack for the CAT 5 cable

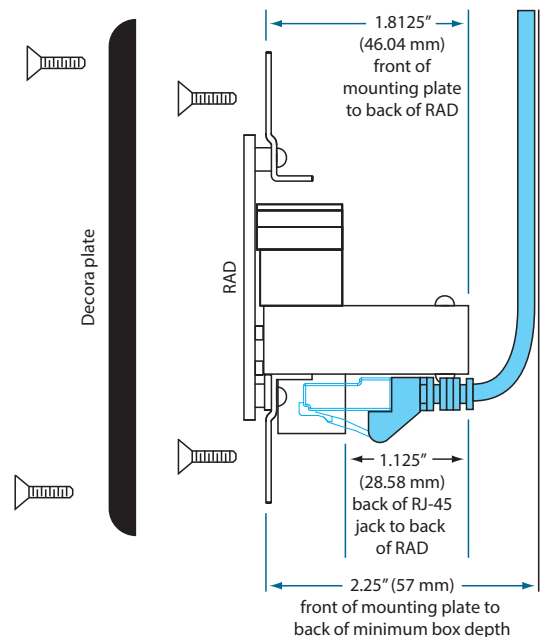

**RAD Specifications**

Parameter	Specification	Limit	Units	Conditions/Comments
Cable Length	500 feet / 153 meters			Shielded CAT 5e or better.
Signal Indicator	-50	typ.	dBFS	Unbalanced / balanced output, green LED, peak-reading
Overload Indicators	-0.5	typ.	dBFS	Unbalanced / balanced output, red LED, peak-reading
<b>Balanced Line-Level Output Specs (Active Balanced)</b>				
Output Impedance	600	1%	$\Omega$	Each Leg
Max. Output Level	18	min.	dBu	<1% THD, Load = 10 k $\Omega$
Dynamic Range	103	typ.	dB	re: 0 dBFS, 20 kHz BW, A-weighted
Frequency Response	10 to 22k	typ.	Hz	+0, -3dB
THD+Noise	0.017	typ.	%	@ 1 kHz, 20 kHz BW, Output = -6 dBFS
<b>Balanced Line-Level Input Specs</b>				
Input Impedance	22.18 k	1%	$\Omega$	1.09 k $\Omega$ + 11.09 k $\Omega$
Max. Input Level	23	min.	dBu	<1% THD
Dynamic Range	102	typ.	dB	re: 0 dBFS, 20 kHz BW, A-weighted
CMRR	-56	typ.	dB	Rs = 150 $\Omega$ , 1 kHz
Frequency Response	10 to 22k	typ.	Hz	+0, -3dB
THD+Noise	0.004	typ.	%	@ 1 kHz, 20 kHz BW, Rs = 150 $\Omega$ , Output = -6 dBFS
<b>Unit</b>				
Conformity: EMC	2004/108/EC, 2002/96/EC, 2002/95/EC. EN55103-1:1996, EN55103-2:1996			
...FCC	Part 15B			Class B Device
Size	4.1"H x 6.7"W x 2.1"D			10.4 x 17.0 x 5.4 cm
...Weight	8.7 oz			247 g
.....Shipping	16 oz (1 lb)			454 g

